



# CONTRACTOR GRADE MASKING TAPE

C-566 | Beige





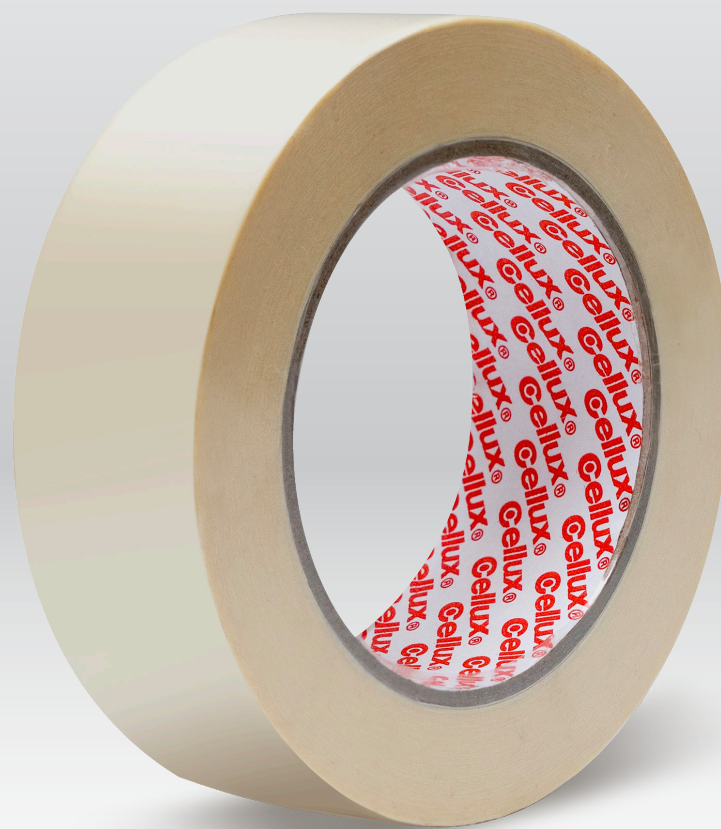

**HIGH  
PERFORMANCE**



## DESCRIPTION

Our **Cellux Contractor-Grade Masking tape** is made of an advanced semi crepe technology that has been validated as the best-priced tape for body shops specially designed for high-performance surface protection and labeling in the construction, automotive, and marine industries achieving up to 5 days of clean removal.

## USES

-  Masking off areas to achieve clean paint lines and protect surfaces from paint splatter or overspray, suitable for water and solvent-based paints.
-  Excellent performance overlapping the tape and over film protectors.
-  Perfect fit on.
-  High-grade body shop

## FEATURES

- ✓ High Adhesion.
- ✓ Excellent holding power.
- ✓ 5 days clean release
- ✓ Easy removal
- ✓ Quick stick.

## TECHNICAL DATA

Property	Standard
Backing	Saturated Crepe paper
Adhesive	Natural Rubber-based
Adhesion to Steel	24.7 (oz/in)
Indoor/Outdoor	Indoor / 5 days outdoor
Service temperature	230°F (1 hour)

## STORAGE CONDITIONS

Tape storage guidelines recommend keeping it in its original packaging, ensuring a cool and dry environment, away from direct sunlight. It is advisable to utilize the tape within 12 months from the date of shipment. Moreover, when applying the tape, ensure that the surfaces are clean, dry, and devoid of any grease, oil, or other contaminants.

## HOW TO USE

- 1 Clean the surface.
- 2 Unroll, Cut and apply.
- 3 Apply pressure with your hand reinforcing the adhesion.

## SIZE

Widths (IN)	Lengths (YD)
1/2"	60
3/4"	
1"	
1 1/2"	
2"	

All measurements are available in individual rolls.

At **Cellux** we understand that each project is different. We can manufacture the size according to your requirement.



**"INNOVATIVE  
ADHESIVE TAPE  
SOLUTIONS  
FOR EVERY  
INDUSTRY."**

